

# For Earth, For Life

information with your local

Kubota dealer.

F

# F2890/F3690

Two revamped models with enhanced cutting and discharge performance make the F-Series the new standard in professional front-mount mowers.





#### **Kubota Australia Pty Ltd**

25-29 Permas Way, Truganina VIC, 3029 Australia Freecall: 1800-334-653 Email: sales@kubota.com.au

Web Site: http://www.kubota.com.au

#### **Kubota New Zealand Limited**

433 Rangitikei Street, Cloverlea, Palmerston North, 4412 New Zealand Freecall: 0800-582-682 Email: sales@kubota.com.au

©2021 Kubota Corporation

Web Site: http://www.kubota.co.nz



Cat.No.2465-01-ANZ Printed in Japan.D.REX.'21-MAY.

# Powerful front-mount mowers with greater productivity and cleaner performance satisfy both professionals and the environment.



# HIGH-PERFORMANCE

Get more jobs done in less time with Kubota's powerful and clean diesel engines and high lifting capacity.

#### **Kubota diesel engines**

Powerful Kubota diesel engines mean faster, more efficient job performance. These F-Series diesel engines have power to spare. Their high torque rise ensures faster, smoother recovery under sudden loading, letting you power through tall or wet grass without skipping a beat. They're also environmentally and economically friendly, thanks to their enhanced combustion efficiency, low vibration and noise levels, and reduced fuel costs.



A high lifting capacity gives the F-Series the versatility to handle an array of implements, including a grass catcher.





#### **Large capacity fuel tank**

A large, 61 litres fuel tank not only keeps you working longer between fuel stops, it also reduces the number of fueling stops needed to complete long jobs. That means more time working and less time fueling up. The refueling pipe is now conveniently located right behind the ROPS.



#### **4WD** and Auto-Assist **4WD**

Auto-Assist 4WD works in forward and reverse, automatically controlling the drive loads on the wheels during turns. Auto-Assist 4WD lets you turn with greater efficiency and ease with less wear and tear on the turf. Fulltime 4WD can also be engaged.



#### **Hydrostatic power steering**

Hydrostatic power steering reduces operator fatigue and makes it easier to mow around trees and other obstacles.



F2890 28HP/3000RPM

F3690 36HP/3000RPM



#### **Single HST pedal**

A powerful hydrostatic transmission provides quick response, excellent Four large-sized tyres provide a working speed, and more muscle for tough mowing jobs. The single pedal design lets you easily change the direction as well as control the speed (4WD: 20 km/h max. forward speed, 11 km/h in reverse), keeping your hands free for steering and implement control for increased productivity.



## **Large tyres with wide**

wide tread for greater stability and manoeuvrability on slopes, better flotation and less ground compaction.



#### **Tilt steering wheel**

The tilt steering wheel can be quickly adjusted to several positions for optimum operator comfort and further driving ease.



#### **High/Low lever**

The handy Hi/Low lever is standard equipped on all models so you can adjust the mower speed to better match the terrain or situation.

## PROFESSIONAL MOWER DECK

A durable, hard-working deck that's ready for a wide range of

mowing jobs.

#### **Pro-Commercial** mower deck

The Pro-Commercial mower deck comes with an inner baffle to prevent cut grass from discharging to the front. A larger discharge chute improves discharge performance.

| 45    | Side dis | charge | Rear discharge |     |  |
|-------|----------|--------|----------------|-----|--|
|       | 60"      | 72"    | 60"            | 72" |  |
| F3690 | 0        | - 0    | 0              | 0   |  |
| F2890 | 0        | 0      | 0              | 0   |  |

## 6.0" deep mower deck

Tall grass is no problem for this side-discharge professional mower deck. Its 6.0"-deep deck design lets tall grass stand up so that it can be cut more efficiently. This results in a faster cut and a cleaner appearance.





### PTO shaft drive

Shaft drive means no belts or pulleys - just smooth and direct power transfer from the engine to the deck and other PTOdriven attachments. Shaft drive also requires less maintenance and provides greater dependability.



#### Multi-V-belt/Steel pulleys

In addition to providing greater wear resistance, the heavy-duty cast-iron pulleys and a multi-V-belt that swivel independently drive system effectively distribute and reduce tension while transmitting power to the mower blades. The multi-V-belt won't twist or slip, thus reducing the chance of damage to the mower. You get more performance and power and fewer problems.



#### **Swivel anti-scalp wheels**

The mower deck is equipped up front with two large wheels through 360 degrees. The wheels ensure that the deck remains above the turf. preventing unsightly turf damage.



#### **Fabricated deck with** sturdy steel construction


Stronger and more durable than conventional pressed steel decks. the F-Series' fabricated steel decks are designed to provide years of reliable cutting performance with minimal maintenance.

#### **Rear discharge mower**

When side discharge won't do, mount an optional rear discharge mower deck. Two sizes—60" and 72"—are available. Both decks tilt up 90 degrees for easier cleaning and blade sharpening. They also feature sturdy steel construction for greater durability and front lift arms that attach directly over the center of gravity for better control. Mulching kits are also available.

#### **Mulching kit (option)**

The professional mulching kit converts the standard deck into a high-precision mulching deck that produces an even finer mulch and sends it straight back into the turf.

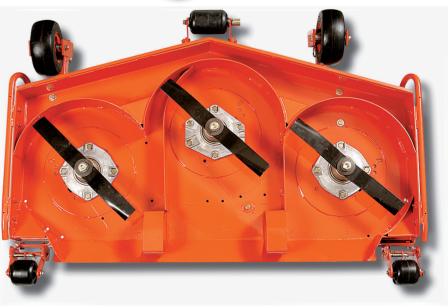

## SIMPLE MAINTENANCE

Designed from the ground up for fast, easy maintenance.

#### **Easy maintenance**

Downtime is unproductive time, so the F-Series is designed for quick and simple maintenance. From the quick-release engine cover to the 90-degree tilt mower deck, every detail has been geared towards getting you back on the job as quickly as possible and keeping you there as long as possible.





The mower deck lifts a full 90 degrees, providing unobstructed access to the blades and deck underside for easier cleaning and maintenance.











#### **Dual-element air cleaner**

The dual-element air cleaner helps keep the engine running smoothly and efficiently. Only the outer filter needs to be replaced—the inner filter can be cleaned with pressured air—helping to reduce maintenance costs.

#### **Integrated radiator screen**

The new, easy to clean radiator screen is integrated into the engine cover to help keep the engine running cool and efficiently. A water temperature gauge and overheating alarm are also provided to help prevent overheating.

#### **New digital panel**

The new easier to read LCD and LED digital panel vital information about the F-Series mower at a glance, including engine speed, remaining fuel, water temperature and hour meter.

#### Tool box

Conveniently located under the seat, the tool box provides fast-access storage for your tools. It's also an ideal place to store your operator manual for quick and easy reference while on the job.


## DRIVING COMFORT

The all-important key to safe, efficient, productive mower operation.

#### Comfort

Long hours on the job can take a toll on operator efficiency. That's why all Kubota F-Series mowers are equipped with a large operator's platform and a variety of features to keep you comfortable and productive under all working conditions. You'll notice the difference after a long day behind the wheel.



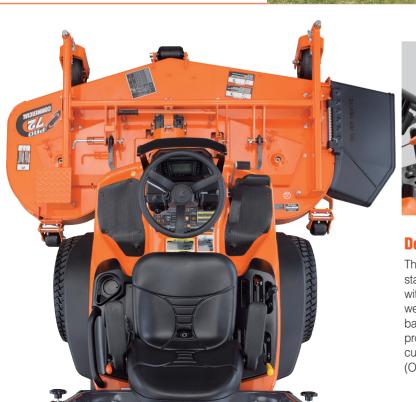



#### **Deluxe seat**

The F-Series' high level of comfort starts with a deluxe high-back seat with four separate adjustments weight control, lumbar support, back angle, and arm rests—to provide every operator with a custom fit and optimum comfort. (Optional air seat available)



#### **Operator levers**

For easier operation and greater convenience, the High/Low speed lever and deck-lifting lever are positioned beside the operator's seat. The lever guides have also been designed for quick, at-aglance identification.

## **SPECIFICATIONS**

| Model                    |                           |            | F2890  | F3690                        |  |
|--------------------------|---------------------------|------------|--|------------------------------|--|
|                          |                           |            | 4WD  |                              |  |
| Engine<br>Model          |                           |            | Kubota D1105   | Kubota V1505                 |  |
| Type                     |                           |            | Liquid-cooled diesel (3 cyl)                                   | Liquid-cooled diesel (4 cyl) |  |
| Max. horsepower          |                           | HP (kW)    | 28 (20.9)  | 36 (26.9)                    |  |
| Total displacement       | ement cm <sup>3</sup>     |            | 1,123 1,498  |                              |  |
| Air cleaner              | Type                      |            | Dual element   |                              |  |
|                          | Air restriction indicator |            | N/A Standard   |                              |  |
| Alternator               |                           |            | 12 V, 40A  |                              |  |
| Fuel tank capacity       |                           | $\ell$     | 61.0   | )                            |  |
| Transmission<br>Type     |                           |            | HST (F2  | :/R2)                        |  |
| Max. travel speed        | Forward / Reverse         | km/h (mph) | 20 (12.5)/1  | 11 (6.8)                     |  |
| 4WD mode select          |                           |            | Auto-assist 4WD with dual acting overrunning clutch/locked 4WD |                              |  |
| Differential lock        |                           |            | Standa   | ard                          |  |
| Tyre<br>Front            |                           |            | 24×12-12   |                              |  |
| Rear                     |                           |            | 18×9.5-8   |                              |  |
| Brake                    |                           |            | Wet discs  |                              |  |
| Steering                 |                           |            |  |                              |  |
| Туре                     |                           |            | Hydrostatic power  |                              |  |
| Tilt steering            |                           |            | Standard   |                              |  |
| Dimension<br>Tread (F/R) |                           | mm         | 1,047/9  | 997                          |  |
| Wheel base               |                           | mm         | 1,300  |                              |  |
| Overall length           |                           | mm         | 2,450  |                              |  |
| Overall width            |                           | mm         | 1,370  |                              |  |
| Overall height           |                           | mm         | 1,985  |                              |  |
| Weight                   |                           | kg         | 748 765  |                              |  |
| Ground clearance         |                           | mm         | 185  |                              |  |
| Mower mounting<br>Type   |                           |            | Independent live   | s. Shaft drive               |  |
| PTO revolution           |                           |            | 2.545  |                              |  |
| Clutch                   |                           |            | Wet multi discs  |                              |  |
| Lift system              |                           |            | Hydraulic 2-point hitch  |                              |  |
| Tilt angle               |                           | Degrees    | 90   |                              |  |
| Weight transfer          |                           |            | Standard   |                              |  |
| Other Turn assist brake  |                           |            | Option   | nal*                         |  |
| Cruise control           |                           |            | Optional   |                              |  |
| Fuel gauge               |                           |            | LCD Display  |                              |  |
| Tachometer               |                           |            | LCD Display  |                              |  |
| Toolbox                  |                           |            | Standard/not available with air seat                           |                              |  |
| Seat                     |                           |            | Reclining suspension seat /optional air suspension seat        |                              |  |
| Cup holder               |                           |            | Standa   | •                            |  |
| oup noidoi               |                           |            | Standard (ISO 212  |                              |  |

<sup>\*</sup>Turn assist brake is standard in the specific country.

#### **Mower Specifications**

| lodel                     |    | RCK60 P-F39 | RCK72P-F39 | RCK60R-F36     | RCK72R-F36 |
|---------------------------|----|-------------|------------|----------------|------------|
| Discharge                 |    | Side dis    | scharge    | Rear discharge |            |
| Cutting width             | mm | 1,520       | 1,826      | 1,520          | 1,826      |
| Cutting height            | mm | 25-127      |            |                |            |
| Cutting height adjustment | mm | Each 6.4    |            |                |            |
| Depth                     | mm | 152 140     |            |                | 0          |
| Deck pan                  |    | Welded      |            |                |            |
| Thickness                 | mm | 4.2         |            | 4.5            |            |
| Number of blades          |    |             | (          | 3              |            |
| Tilt assist               |    | N/A         | Standard   | N/A            | Standard   |
| Mulch kit                 |    | Optional    |            |                |            |

The company reserves the right to change the above specifications without notice.

This brochure is for descriptive purpose only. Please contact your local Kubota dealer for warranty and safety information.

For your safety, KUBOTA strongly recommends the use of a Roll Over Protective Structure (ROPS) and seat belt in almost all applications.