



5'(1.5m) & 6'(1.8m) MIN-TILL


Designed for tight areas where big drills simply don't fit, these 5' and 6' Min-Till Drills from Great Plains are ideal for seeding food plots, orchards, and vineyards. Offered with ground-driven meters, they are excellent for seeding into both fully prepared seedbeds or minimum tillage plots. The vineyard model's (3P500V) low-profile box is designed specifically for vineyards and orchards.



5' & 6' MOUNTED MIN-TILL MODELS

5' & 6' Min-Till	Row Spacing	Working Width	Transport Width	Height	Engine H.P. Required	Weight
3P500V	6"	52.5" (1.3m)	58" (1.5m)	50" (1.27m)	35+	499-590kg
3P500	6", 7.5"	52.5" (1.33m)	59.3" (1.51m)	61" (1.55m)	35+	531-621kg
3P600	6", 7.5"	67.5" (1.72m)	74.1" (1.88m)	61" (1.55m)	40+	665-720kg

See www.greatplainsag.com for complete specifications.

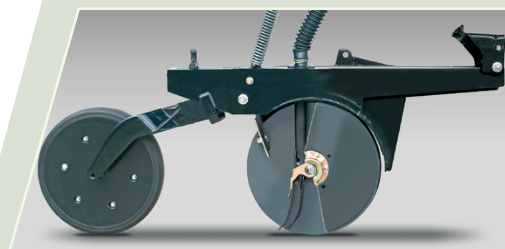

00 SERIES OPENER

00 Series openers provide accurate and consistent seed placement. 00 Openers have 7" of stagger, allowing residue to easily flow through the unit. Inside the opener, the full-length seed tube gently guides the seed all the way to the bottom of the trench while the seed flap ensures the seed stays in place, eliminating the "seed bounce" experienced with competitive drills. The trailing press wheels maintain proper opener depth, close the seed trench, and firm the seed into the soil.



ADDITIONAL STANDARD FEATURES


- Cat. 1 and 2 lower hitch plates
- Digital acremeter
- V-bottom dividers
- 350 litre main seed box on 3P500 and 420 litre on 3P600
- 300 litre seed box on 3P500
- Direct link press wheel for depth control
- Heavy-duty coil springs
- Seed tubes and flaps
- Walkboard w/ steps on 3P500 and 3P600 models (walkboard is optional on 3P500V)
- Watertight manual holder
- Calibration crank
- LED safety lighting

*only available by ordering through Parts




4-SPEED GEARBOX

Changing seed rates is quick and effortless with these permanently lubricated, sealed gearboxes.

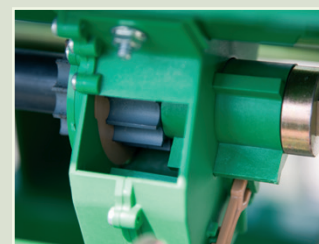

1 1/4" FLUTED FEED CUPS

With powdered metal flutes, these 1 1/4" seed cups deliver outstanding accuracy.

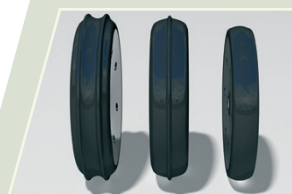


PRESS WHEEL CHOICES

Choose either 3"x13" double rib*, 3"x13" center rib, or 2"x13" smooth press wheels.



CENTER-MOUNTED DRIVE WHEELS

Eight settings allow the height of the ground drive wheel to be repositioned as needed.



T-HANDLE DEPTH CONTROL


18-position T-handle adjusts the rear gauge wheel for accurate depth control.

OPTIONS

(see website for complete list of features & options)



SMALL SEEDS BOX ATTACHMENT

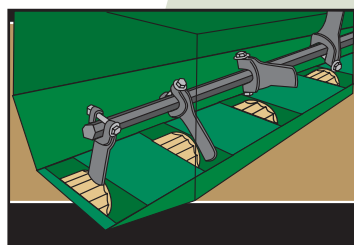

SEED BOX AGITATOR



SEED FIRMER



SEED PLUGS