12'(3.7m) - 20'(6.1m) Min-Till

Great Plains offers these smaller 3-point models to fill a wide range of applications and farming practices. They offer large seed boxes with the ability to add other optional boxes to seed small seeds and/or apply dry fertilizer. They can be turned from min-till to no-till by adding a Great Plains Center Pivot Hitch (CPH) or Precision Fertilizer Hitch (PFH).

12', 15' & 20' 3-POINT MODELS

12', 15' & 20' 3-Point Drills	Working Width	Transport Width	Engine H.P. Required	Row Spacing	Weight
1200	12' (3.7m)	12' 11" (3.9m)	85+	6", 7.5"	1070-1342kg
1500	15ft (4.6m)	15' 11" (4.9m)	110+	6", 7.5"	1,294-1,621kg
2000	20ft (6.1m)	21' (6.4m)	250+	6", 7.5"	1,733-2,168kg

See www.greatplainsag.com for complete specifications.

12' Model
1200

15' Model
1500

20' Model
2000

ADDITIONAL STANDARD FEATURES

- 9.5L x 15 gauge wheel tires (12' and 15' models)
- 11L x 15 gauge wheel tires (20' models)
- Slotted clevis gauge wheel turnbuckle
- Gauge wheel brake
- Protected gauge wheel drive chain
- 2.4 bu./ft. (84.6 litres/ft.) seed box capacity
- Lift-assist cylinder on box lid
- Seed level indicator
- Acremeter
- 17½"-wide walkboard w/ steps at each end
- Tapered roller gauge wheel bearings
- LED safety lighting

*only available by ordering through Parts

OPTIONS
(see website for complete list of features & options)

FEATURES & BENEFITS

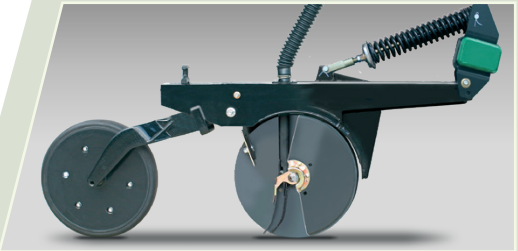

00 SERIES OPENER (1200, 1500, 2000)

00 Series openers feature a proven welded box design, 13.5", 4mm blades mounted on 205 triple-lip sealed bearings, and have a ¼" lead opener blade for easier penetration in tough conditions. A rear depth-controlling gauge wheel uses a T-handle adjuster with 18 depth settings. A full-length seed tube guides the seed to the bottom of the seed trench for exceptional accuracy. Optional seed firmers gently press the seed into the soil to ensure proper seed-to-soil contact.



DUAL OR 2 SINGLE GAUGE WHEELS

Choose between single or dual gauge wheels. Single gauge wheels can be ordered with either implement tires or heavy-duty skid steer tires.

PRESS WHEEL OPTIONS

Choices include 3"x13" double rib* press wheels, 3"x13" center rib press wheels that create a crease over the seed to aid in even seed emergence, or 2"x13" smooth press wheels that firm the soil directly over the seed.

4-SPEED GEARBOX

Changing seed rates is quick and effortless with these permanently lubricated, sealed gearboxes.

HEAVY-DUTY MAINFRAME

Category 2, 3, and 3N hitch on a heavy-duty trussed mainframe provides unmatched strength and durability.



V-BOTTOM DIVIDERS

Dividers help distribute all the seed to the seed cups.

SMALL SEEDS BOX ATTACHMENT

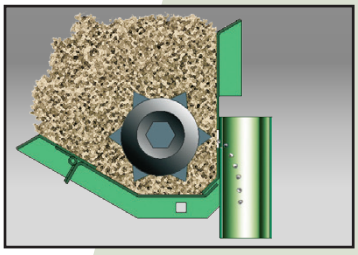

FERTILIZER ATTACHMENT

ROW MARKERS

PRESS WHEEL SCRAPERS