



10'(3m) – 25'(7.6m) CUSTOM

The 4-, 6-, 8-, and 10-row Yield-Pro® Planters from Great Plains give smaller farmers access to the same yield-increasing technologies found in larger planters. Offered in four sizes, these compact planters are designed around the Air-Pro® metering system, delivering a new level of spacing and seed placement accuracy. For added versatility, these planters can be ordered in single- or twin-row spacings and are available in either 3-point mounted or pull-type configurations.



10'-25' CUSTOM PLANTERS

10'-25' Custom Planters	Working Width	Transport Width	Transport Height w/o Markers	Engine H.P. Required	Row Spacing	Base Weight	Seed Capacity per Row
YP425A	10' (3m) - 13'4" (4m)	10' (3m) - 15' (4.6m)	6'6" (1.98m)	75+	30", 36", 38", 40", TR30", TR36", TR38", TR40"	1,134-1,542kg	1.6 bu., 3 bu.
YP425A3P	10' (3m) - 13'4" (4m)	10' (3m) - 15' (4.6m)	6'6" (1.98m)	85+		1,361-2,177kg	1.6 bu., 3 bu.
YP625A	15' (4.6m) - 20' (6.1m)	15' (4.6m) - 20' (6.1m)	6'6" (1.98m)	95+		1,678-2,177kg	1.6 bu., 3 bu.
YP625A3P	15' (4.6m) - 20' (6.1m)	15' (4.6m) - 20' (6.1m)	6'6" (1.98m)	100+		1,905-2,812kg	1.6 bu., 3 bu.
YP825A	20' (6.1m) - 25' (7.6m)	20' (6.1m) - 26' (7.9m)	6'6" (1.98m)	115+		2,268-3,175kg	1.6 bu., 3 bu.
YP825A3P	20' (6.1m) - 25' (7.6m)	20' (6.1m) - 26' (7.9m)	6'6" (1.98m)	115+		2,268-3,629kg	1.6 bu., 3 bu.
YP1025A3P	22' (6.7m) - 25' (7.6m)	22'7" (6.9m) - 26' (7.9m)	8'9" (2.7m) - 6'6" (1.98m)	130+	22", 30"	2,767kg	3 bu./row

See www.greatplainsag.com for complete specifications.

4-ROW



8-ROW



ADDITIONAL STANDARD FEATURES

- First set of seed discs included (additional seed discs are optional)
- Side-depth wheels are 2½"-wide for twin row models; 3"-wide for 22" models; 4"-wide for 30", 36", 38", and 40" models
- Low hydraulic requirements
- Air-Pro® metering and fan system
- 7" square frame tubing
- 8R19.5 LT gauge wheel tire
- Heavy-duty row unit down-pressure springs (up to 500 lbs (227kg)/.row)
- Blade separator w/ stainless fertilizer tube
- Clear-Shot® seed tubes
- DICKEY-john® PM300 seed monitor w/ speed sensor
- Ground-engaging positive drive system
- Clevis or single strap hitches
- LED safety lighting

*only available by ordering through Parts

OPTIONS

(see website for complete list of features & options)



GAUGE WHEEL SCRAPERS




MARKERS



LIQUID OR DRY FERTILIZER




FERTILIZER DRIBBLERS




COULTERS & ROW CLEANERS

FEATURES & BENEFITS

25 SERIES ROW UNIT

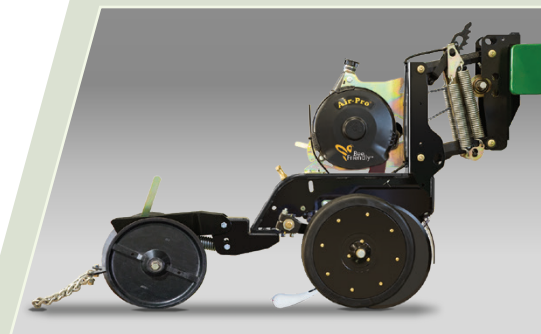

The 25 Series row unit utilizes ductile cast parallel arms for long-term row unit stability. 15", 4mm blades turning on 205 triple-lip sealed bearings ensure long life and accurate seed depth. Blades are offset ½" to slice residue and form a perfect seed trench.



AIR-PRO® METER

This simple, positive air pressure meter offers the highest level of singulation on the market today, and achieves uniform spacing by "dead-dropping" seed into the patented Clear-Shot® seed tube. Gentle on seeds, it is more efficient than a vacuum meter and requires less maintenance.



CHOOSE A PRESS WHEEL

Choose (from left) cast for sticky Delta soils; wedge to pinch the seed trench together while providing a wide footprint; 1"x12" double-V for all-around performance; or spider wheels with drag chains for aggressively closing the seed trench.



SEED CAPACITY

1.6 bu./row hoppers on twin-row models and 3.0 bu./row hoppers (shown) on single-row models.



AVAILABLE ROW SPACINGS

Multiple row spacings are available to match a variety of needs, including 30", 36", 38", and 40" single- or twin-row configurations.



PULL-TYPE OR 3-POINT

Choose 3-point mounted or pull-type configurations. Pull-type machines can be optioned with either liquid or dry fertilizer.